

# IVSrail1000P DC/AC Pure-Sinewave Inverter



## Benefits

- Ultra-Quiet
- Power sensitive electronics without interference
- Rugged & Reliable
- Ensure years of safe and trouble free operation

## Applications

- Railway / Transportation
- Mining
- Oil Rigs
- Military Applications
- Marine / Automotive / RV
- Electric Utilities and Substations
- Telecom Power Plants
- Manufacturing Locations
- Steel Mills
- Industrial Controls
- OEM Applications

## DC/AC Inverters

### IVSrail1000P Series Pure-Sinewave

#### Description

This rugged DC/AC inverter uses field proven, microprocessor controlled high frequency PWM technology to generate the required output power with pure sine wave output voltage.

It is a mature design with a track record in numerous applications. The DC/DC input stage boosts the input voltage to a higher DC voltage, which feeds the DC/AC inverter to generate the required AC output.

The high frequency conversion enables a compact construction, low weight and high efficiency.

The unit has full electronic protection.

The input and output are filtered for low noise.

It is built with internal power modules that are entirely potted with a thermally conductive MILgrade silicon rubber compound to ensure immunity to high levels of shock, vibration and humidity.

Cooling is via baseplate to a cold plate surface and by additional natural convection.

The use of components with established reliability results in high MTBF.

The unit meets the requirements of EN 50155 for electronic equipment used on railway rolling stock.

It is manufactured at our plant under strict quality control.

Customized versions are available.


#### Features

- Fully encapsulated internal modules
- Very low input ripple current
- Low profile
- Compact size, light weight
- Sinusoidal wave shape
- 1000VA of output power
- Full electronic protection
- Field-proven design topology
- Conduction/convection cooled - no fan

# Specifications ( Specifications Subject to Change Without Notice)

<b>Input Voltage</b>	24Vdc (17 – 34V), 36Vdc (25 – 51V), 48Vdc (33 – 67V) 72Vdc (50 – 101V), 96Vdc (67 – 135V), 110Vdc (77 – 154V) Consult factory for other inputs
<b>Input Protection</b>	Inrush current limiting Varistor Reverse polarity protection Internal safety fuse Lower voltage than the specified minimum input will not damage the unit
<b>Isolation</b>	1500VDC Input to chassis 3000VDC Input to output
<b>Standards</b>	Designed to meet C22.2 No. 107.1 - 01, UL 458, EN60950 and EN50155
<b>Output Voltage</b>	230Vac @ 50Hz/4.3A rms continuous or 115Vac @60Hz or 400Hz/8.7A rms continuous Output neutral is connected to the chassis internally Isolated floating output optional Consult factory for other output requirements
<b>Wave Form</b>	Sinusoidal
<b>Total Harmonic Distortion</b>	Less than 5% at full load
<b>Efficiency</b>	Typically 80% at full load Dependent on input/output combination
<b>Line Regulation</b>	Maximum $\pm$ 0.5%
<b>Load Regulation</b>	Maximum $\pm$ 6% from no load to full load A $\pm$ 2% load regulation option is available
<b>Output Overload Protection</b>	Current limiting with short circuit protection Thermal shutdown with automatic recovery in case of insufficient cooling
<b>Output Overvoltage Protection</b>	280Vac (for 230Vac output) or 140Vac (for 115Vac output) by internal supply voltage limiting
<b>EMI</b>	EN55022 Class B and EN50121-3-2 conducted and radiated
<b>Immunity</b>	Meets criteria of EN50155 and EN50121-3-2 including EN 61000-4-2 (ESD) EN61000-4-3 (RF Immunity) EN61000-4-4 (Fast transients) EN50155 (Surge) EN61000-4-6 (Conducted Imm.) EN50155 (Voltage Variations)
<b>Load Crest Factor</b>	Maximum 2.5 at 90% load
<b>Output Ripple Noise</b>	High frequency ripple is less than 500mVrms (20MHz BW)
<b>Operating Temperature Range</b>	-25 to +55°C cold-plate temperature
<b>Humidity</b>	5 - 95% non-condensing
<b>Temperature Drift</b>	0.05% per °C over operating temperature range
<b>Cooling</b>	Conduction via base plate to customer cold plate
<b>Environmental Protection</b>	Fully encapsulated internal modules
<b>Shock/Vibration</b>	IEC 61373 Cat 1 A&B
<b>Dimensions</b>	F31: 483 x 68 x 356 mm (H x W x L) including terminal block and flanges Mounting holes are clear
<b>Connections</b>	Input: terminal block or threaded studs Output: compression-type terminal block
<b>Weight</b>	12.5 Kg
<b>MTBF</b>	150,000 hours at 45°C Demonstrated MTBF is significantly higher
<b>Indicators</b>	None
<b>Control Input</b>	None Optional remote shut down
<b>Alarm output</b>	None Optional output Fail Alarm (Form C)
<b>RoHS Compliance</b>	Fully compliant
<b>Warranty</b>	2 years

Available from:

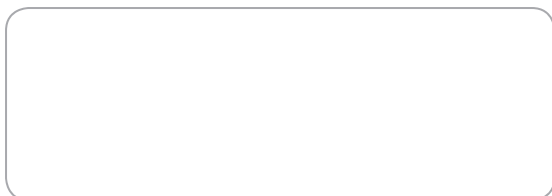

## RIPEnergy®

The power conversion company

RIPEnergy AG  
Wägitalstrasse 24  
CH-8854 Siebnen  
Switzerland

Ph +41-(0)43-818 53 85  
Fax +41-(0)43-818 53 87  
www.ripenergy.ch